


3.7" [95 mm]

The model IT9420 is a rugged yet simple device which provides a 4 to 20 mA current feedback signal for incline position. The heart of the IT9420 is a magnetically-damped pendulum coupled to a conductive plastic precision potentiometer. A highly linear relationship between inclination and a 4 to 20 mA output is maintained over the full range of the IT9420.

The IT9420 is easy to use: simply attach it to the object of measurement and install two wires for the current loop.

## **Output Signal**

5.4" [137 mm]



# **IT9420**

# Inclinometer • 4..20 mA

Measuring Range Options from 0-45° to 0-240° Aluminum or Stainless Steel Enclosure Options

Perfect for Water Management/ Tainter Gate Position

IP68 • NEMA 6 Protection • Hazardous Area Certification

#### General

Available Full Stroke Ranges 0-45 to 0-240 degrees

Weight (aluminum enclosure) 5 lb. typical (aluminum enclosure)

Enclosure Material aluminum (stainless steel available)

Sensor precision potentiometer

Electrical Connector MS3102E-14S-6P

Mating Plug (included) MS3106E-14S-6S

## Electrical

Output Signal 4...20 mA

Input Voltage see ordering information

Input Current 20 mA max.

Circuit Protection 38 mA maximum

## Performance

**Sensitivity** 16 mA/full stroke, ± 0.25%

Accuracy\* ± 1% full stroke

**Accuracy Option** 0.5% full stroke (please contact factory)

Resolution essentially infinite

## Full Stroke Ranges of 45° - 105°

Zero Adjustment from factory set zero to 20% of full stroke range

**Span Adjustment** to 20% of factory set span

# Full Stroke Ranges of 120° - 240°

Zero Adjustment from factory set zero to 40% of full stroke range

**Span Adjustment** to 40% of factory set span

\*–when plane of pendulum motion parallel to plane of rotation within  $\pm~3\,^{\circ}$ 

### **Environmental**

Enclosure

NEMA 4/4X/6, IP 67/68

Hazardous Area Certification

See ordering information

Operating Temperature


-30° to 200°F (-34° to 90°C)


Vibration

up to 10 g to 2000 Hz maximum

**SENSOR SOLUTIONS** /// IT9420 12//2015 Page 1

# **Outline Drawing**

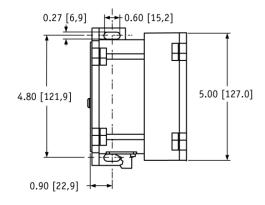





4.83 [122,7]

DIMENSIONS ARE IN INCHES [MM] tolerances are  $\pm 0.02$  in. [ $\pm 0.5$  mm] unless otherwise noted

000

# **Ordering Information**

**Full Clockwise Rotation:** 

CW order code:

### **Model Number:**



015

15°

030

30°

Sample Model Number:

### IT9420 - 060 - 120 - 1110

cw clockwise rotation: CCW counter-clockwise rotation:

 $\frac{60^{\circ}}{120^{\circ}}$  total rotation =  $180^{\circ}$ A enclosure:
B output signal: aluminum 4 mA @ 120° CCW 20 mA @ 60° CW


5.10 [129,5]

electrical connection: magnetic dampening: 075 090

6-pin plastic conncector 105 120

105°

120°



# Important--

060

60°

the sum of the Clockwise and Counter-Clockwise Rotations must be in the range of 45° to 240°


75°

Full	Counte	r-Clockwise	Rotation:

CCW <u>order code:</u>	000	015	030	045	060	075	090	105	120
	00	15°	30°	45°	60°	75°	90°	105°	120°

045


45°




### Important--

the sum of the Clockwise and Counter-Clockwise Rotations must be in the range of 45° to 240°

## **Enclosure Material:**

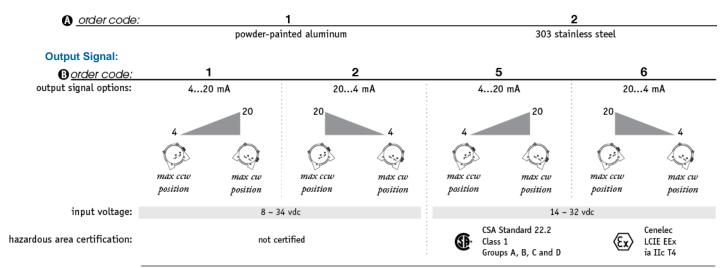

\*IMPORTANT: intrinsically safe when powered from a CSA certified zener barrier rated 28 VDC max, 110 mA max per installation drawing#677984

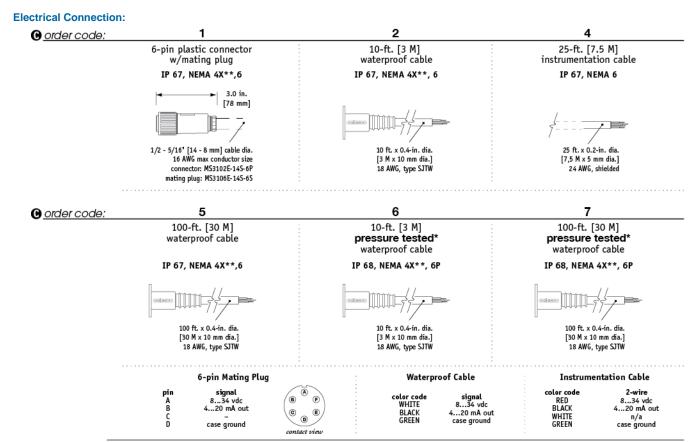

\*–Test pressure: 100 feet [30 meters] H<sub>2</sub>O (40 PSID) Test Medium: Air; Duration: 2 hours. \*\*–applies to stainless steel enclosure only.

### **Dampening Option:**

O order code:


O the magnetic dampening

with magnetic dampening

without magnetic dampening

## **Output Signal Selection:**

The output signal direction can be reversed at any time by simply changing the dip-switch settings found on the internal signal board. After the settings have been changed, adjustment of the Zero and Span trimpots will be required to precisely match the 4 mA and 20mA signal values to the beginning and end points of the stroke.

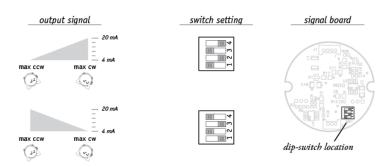

To gain access to the signal board, remove four Allen-Head Screws and remove end cover bracket.

