



G-SERIES INCLINOMETER

SPECIFICATIONS

Single axis inclinometer

Measurement range $\pm 10^\circ$

Switch output

Wall mounting

FEATURES


- Robust housing
- High accuracy
- Protection class IP 67
- Wall mounted
- Simple clamp
- EMC Protection

APPLICATIONS

- Building construction machines
- Building control
- Mobile and stationary cranes
- Forklift
- Alarm switch

The **G-Series** consist of a single axis conductive tilt sensor on a modern technology in environmentally protected and robust aluminum housing for wall mounting. The fast microcontroller works with a linearization and temperature compensation routines. This fully calibrated inclinometer offers a switch output signals. The inclination switch enables the angle of inclination of objects such as appliances, machines or motor vehicles to be monitored and emits an alarm signal when the angle is exceeded. The switch threshold can be set symmetrically by the customer in a range of $\pm 10^\circ$.



Dimensions [mm]

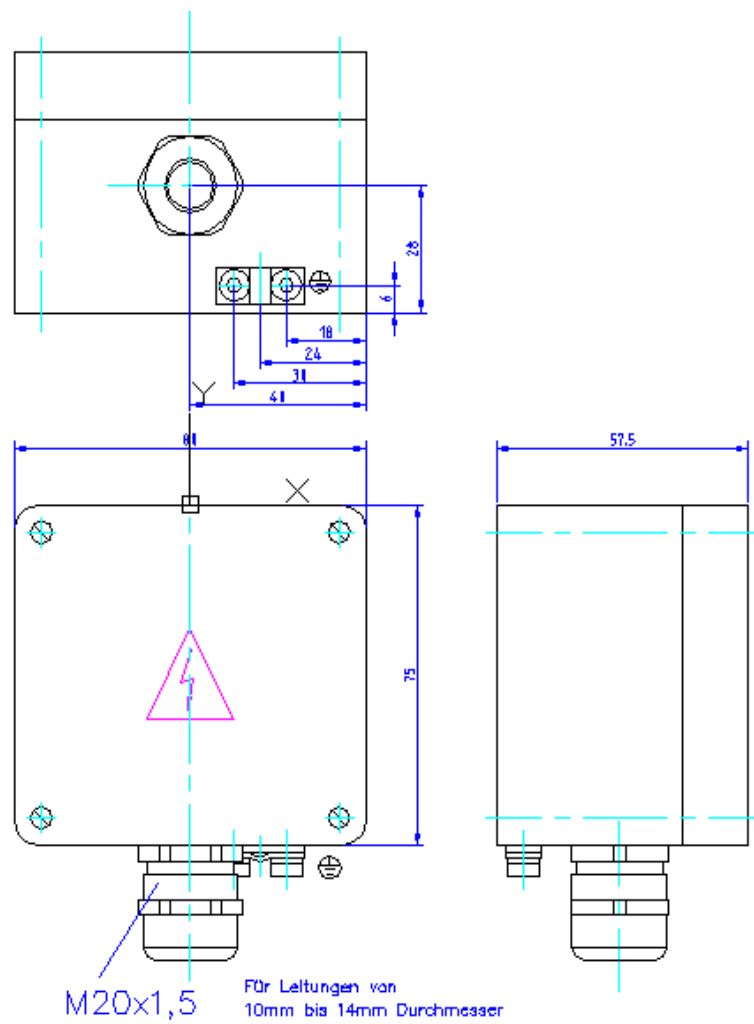

PARAMETERS

	Conditions	Min	Typ	Max	Units
Measurement range		-10		+10	°
Resolution			0.001		°
Switch threshold adjustable	Single step 0.1	0.1		9.9	°
Precision	T=25°C	-0.1		+0.1	°
Precision (absolute)	T=-25 to +85°C	-0.25		+0.25	°
Switch output	load		10	50	mA
Switch voltage		+0.1		+140	VDC
Switch hysteresis		0.05		0.15	°
Terminal strip		0.08		2.5	mm ²
metric screw	Diameter M20, cable ø	8		12	mm
Voltage supply		+14.4		+30	VDC
Current consumption			15	20	mA
Operating temperature		-25		+85	°C
Storage temperature		-40		+85	°C
Protection class IP			67		IP
Weight			380		g
Dimensions	W x D x H		80 x 57 x 75		mm

PINNING:



For more details please use the product specification / application note / instruction manual.

G-SERIES INCLINOMETER

ORDERING INFORMATION

PART NUMBERING	UNIT	SHORT DESCRIPTION
G-NSG-001	NS-10/G	single axis, range +/-10°;Vcc 14.4...30VDC, switch output