

Available in both 250 and 400-inch stroke ranges, this off-the-shelf linear position sensor is the perfect solution for applications ranging from mobile construction equipment to hydraulic lift tables and anything else in between. The SKD offers compact design, ease of use and the utmost in flexibility. Every unit offers the customer a user-selectable 4-20 mA or 0-10VDC output signal option, an easily adjustable stainless steel mounting bracket for multiple installation options and the ability to change the direction of the electrical connector to accommodate the user's wiring needs.

Our unique electronic circuitry and an extremely durable spring-loaded stainless steel measuring cable deliver an accurate reliable "absolute" position feedback signal over the entire stroke. This model is economically priced making it the perfect solution for both the single piece user and OEM customers alike.

SKD

Cable Actuated Sensor User Selectable 4..20mA / 0..10Vdc Output

Linear Position to 400 inches (10 m)

Compact Design • Simple To Install

User Adjustable Measuring Cable Orientation

IN STOCK for Quick Delivery!

Specifications

Stroke Range Options 250 inches (6.4 m), 400 inches (10.2 m)

User Selectable Output Signal 4...20mA (2-wire) / 0...10 Vdc

Input Voltage, 4...20mA Option 8-40 VDC

Input Voltage, 0...10 VDC Option 12-32 VDC

Accuracy .35% FS.

Repeatability .05% FS.

Resolution essentially infinite

Measuring Cable .031-inch dia. bare stainless steel

Maximum Cable Velocity 60 inches per second

Maximum Cable Acceleration 5 g

Measuring Cable Tension 23 oz. (6.4 N) \pm 40%

Sensor plastic-hybrid precision potentiometer

Cycle Life \geq 250,000


Electrical Connection 4-pin M12 connector, mating plug included

Enclosure glass-filled polycarbonate


Environmental IP67

Operating Temperature -40° to 185° F (-40° to 85° C)


Output Signal

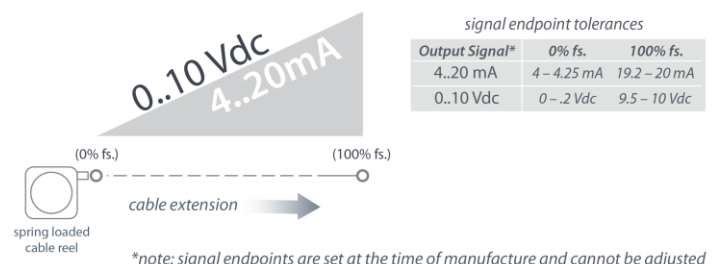

Outline Drawing

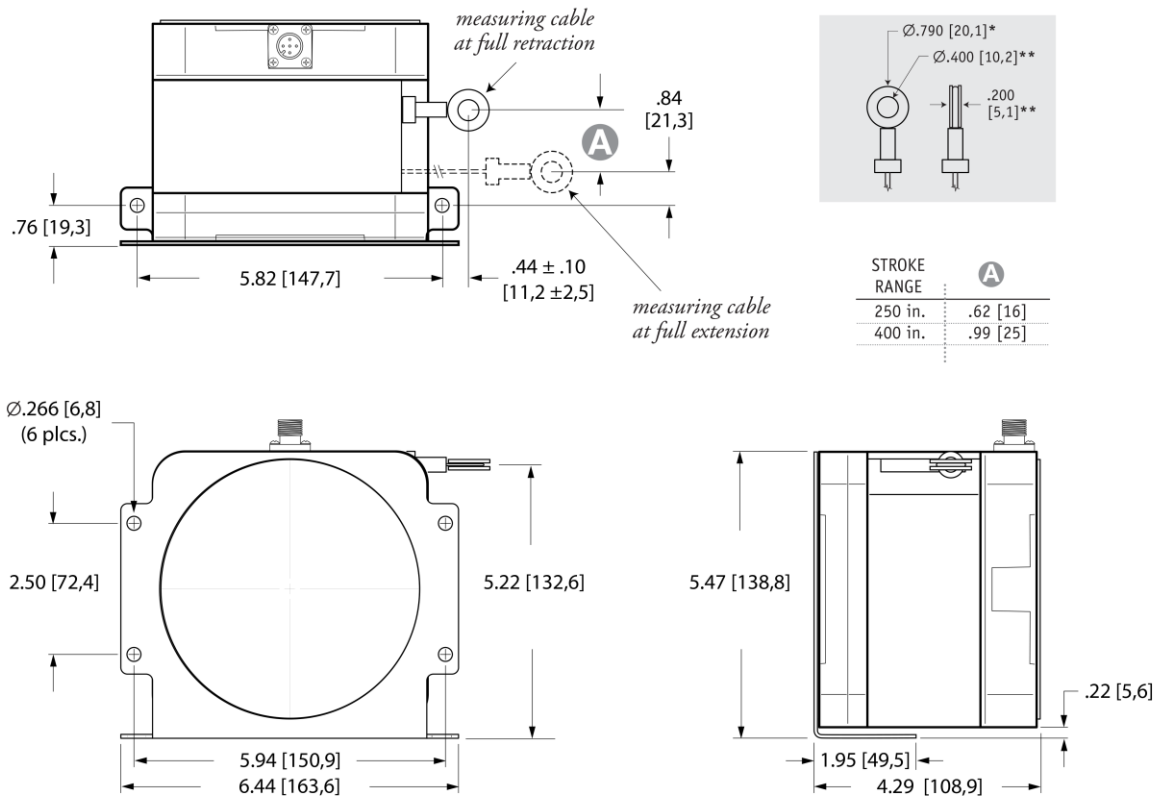

Mounting Options

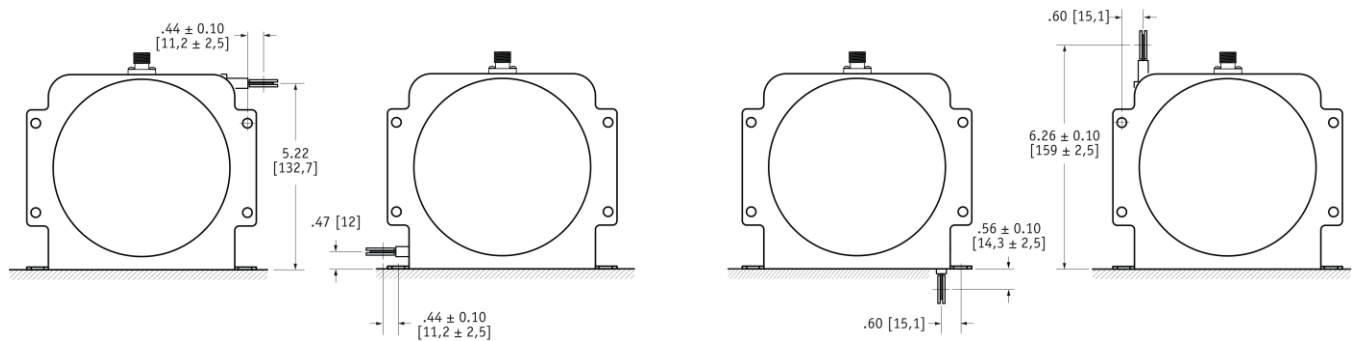


To change cable exit direction:


simply remove the 4 bracket mounting screws and rotate sensor body to desired direction.

To change electrical connector orientation:

remove the 4 rear screws and carefully remove the rear cover and rotate cover.

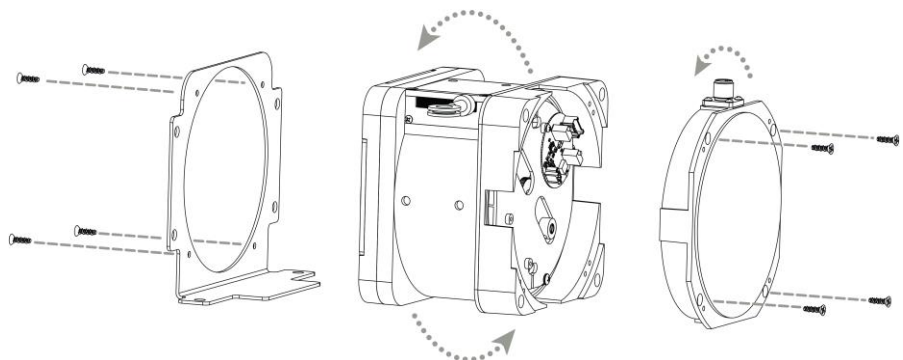


Ordering Information

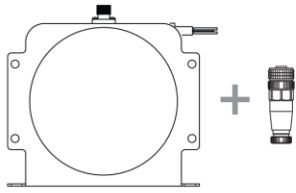

Part Number	full stroke range	accuracy	max. acceleration	measuring cable tension (± 40%)
SKD-250-3	250 in (6.4 m)	.35%	5 g	23 oz. (6,4 N)
SKD-400-3	400 in (10.2 m)	.35%	5 g	23 oz. (6,4N)

includes mounting bracket & mating connector.

Optional Cordsets



Part Number	length	wire size	connector
9036810-0040	13 ft (4 m)	22 AWG (.34mm ²)	straight 4-pin M12
9036810-0041	13 ft (4 m)	22 AWG (.34mm ²)	90° 4-pin M12




Electrical Connection

Output Signals

0..10Vdc	4..20mA	pin	pin - color
12..32 Vdc	8..40 Vdc	1	1 - brown
0..10 Vdc	n/c	2	2 - white
n/c	n/c	3	3 - blue
common	4..20 mA	4	4 - black




field installable connector




optional cordset

field installable connector




contact view

customer supplied electrical cable
(.25 in [6 mm] max. dia.)

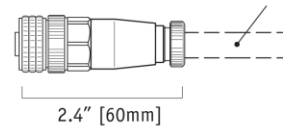

2.4" [60mm]

4..20 mA Signal Connections

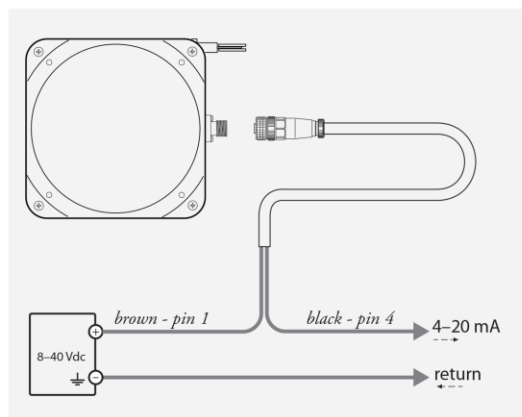

0..10 Vdc Signal Connections

