


Introducing the world's smallest stringpot. The M150 is smaller than a thumbprint and occupies a tiny space of only .74 x .74 x .38 inches. With a full stroke measurement range of 1.5 inches, the M150 has been designed for many aerospace and automotive space-critical test applications such as throttle position and crash-test instrumentation.

The heart of the M150 is a precision high-cycle conductive plastic potentiometer that delivers a high-linearity voltage position feedback signal. With its rugged all aluminum construction, the M150 has been engineered for reliability and to provide quick, easy and hassle-free installation.

## Electrical Connection



# M150

## World's Smallest Stringpot

**Ultra-Miniature String Pot • Voltage Divider Output**

**1.5-inch Stroke Range**

**Precision High-Cycle Potentiometer**

**Designed for Test and Space-Critical Applications**

### General

Full Stroke Range	0-1.5 inches
Output Signal Options	voltage divider (potentiometer)
Accuracy	± 1% full stroke
Resolution	essentially infinite
Sensitivity	897 – 924 mV/V full stroke
Measuring Cable	.014-inch dia. nylon-coated stainless steel
Measuring Cable Tension	4 oz. ±25%
Maximum Measuring Cable Acceleration	39 g
Enclosure Material	anodized aluminum
Sensor	conductive plastic precision potentiometer
Potentiometer Cycle Life	5 million cycles
Weight	0.5 oz. max.


### Electrical

Input Resistance	5K ±10% ohms
Recommended Output Signal Current	< 1µA
Recommended Maximum Input Voltage	20 VDC

### Environmental

Enclosure	NEMA 12, IP 50
Operating Temperature	-40° to 185°F (-40° to 85°C)
Temp. Coefficient of Sensing Element	.0028%/°F (.005%/°C)
Vibration	up to 10 g at 30 – 2000 Hz max.


### Output Signal

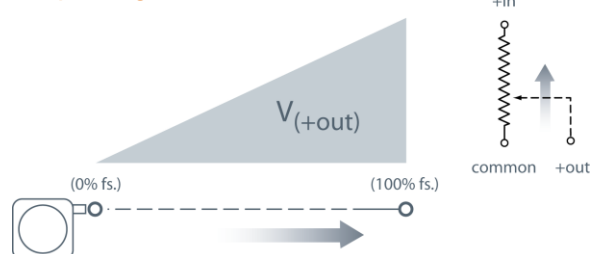

## M150

World's Smallest Stringpot

### Outline Drawing

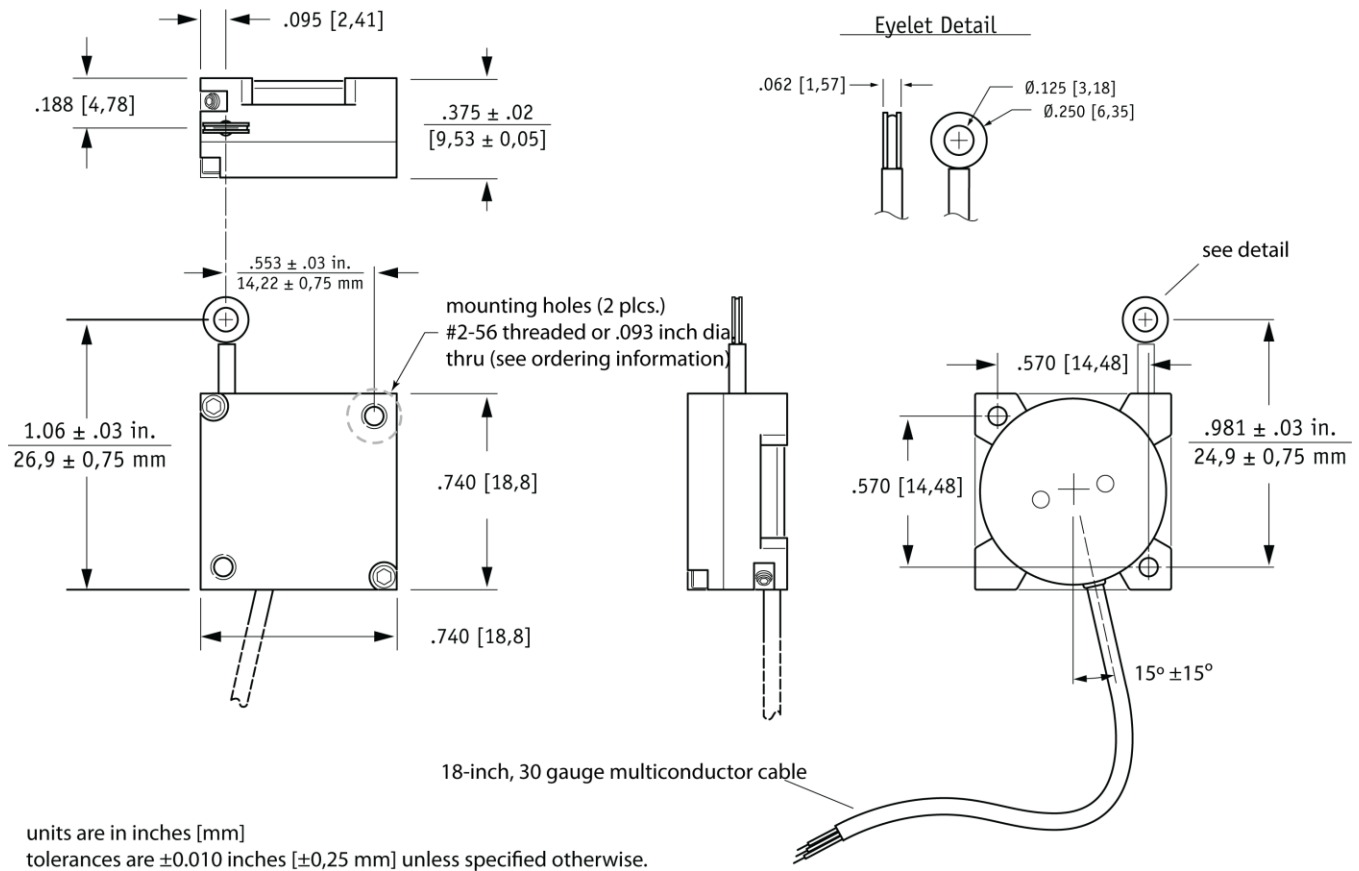

### Ordering Information

#### Model Number

**M150 - 4 - A - B - 5K - C1**

order code:

Sample Model Number:

**M150 - 4 - H1 - E - 5K - C1**

**A** mounting hole style:  $.093$  inch dia. thru  
**B** measuring cable termination: eyelet

#### Mounting Hole Style




**A** order code:

**H1**

$.093$  thru

**H2\***

threaded




\*includes: 4) #2-56 x 3/8" pan head mounting screws with washers

Measuring Cable Termination

**B** order code:


**E**

Eyelet



**L**

Leader Cable

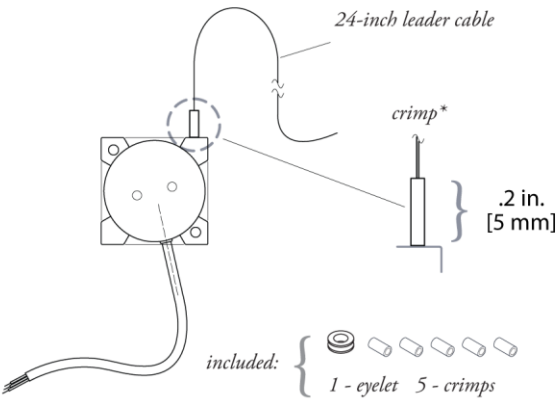

\*note: crimped stop prevents leader cable from retracting into sensor body